

Powerful machine for the pros

HALLDE's VCM is one of the industry's primary vertical cutters. Its unique functions for quick preparation and its robust quality make it ideal for all professional kitchens from private restaurants to public sector catering operations.



Four-armed scraper

The VCM has a scraper system designed to prevent food getting stuck on the inside and the lid of the bowl, where the knives are unable to reach. The scraper arms keep the lid and the inside of the bowl clean. At the same time they move the ingredients back towards the knives. The VCM's scraper system has four arms instead of one. It is a patented function that means that the rotation of the ingredients in the bowl is stopped enabling the knives to cut the contents more effectively. This accelerates preparation time considerably and minimises the heat release that arises when preparing. The lid has a 5 cm wide feed tube for filling while the machine is running.



Adapted speeds

You can run the VCM-42 at two speeds; 1,500 rpm for gentle preparation and better control when chopping, and 3,000 rpm for rapid mixing or blending of sauces or minced meats. The VCM-41 has one speed; 1,500 rpm. The VCM also has a direct action pulse function. This pulse function provides direct access to 1,500 rpm without any irritating time delays.



Powerful knife unit

The VCM has a generously sized knife unit of acetal with two large knives that effectively cut through the ingredients. The removable knives are serrated in order to maintain their sharpness longer.



The VCM has three individual safety switches. You can only start the machine if the bowl, lid and safety arm have been correctly fitted. The VCM has a mechanical motor brake which means the knives stop rotating immediately when the safety arm is turned to the side. As the motor brake is mechanical, it also works in the event of electrical faults or power failures.



- O J N

User friendly ergonomics

You control the machine using one knob instead of several buttons. The knob is located on the left hand side allowing your right hand to remain free for the scraper or for filling. The knob is at a convenient height to ensure an ergonomic working posture.



Easy to carry

Both the machine and bowl have two large handles that make them easy to carry even if you have wet hands.



Only the best material

The machine base is manufactured of robust metal. The bowl is stainless steel. The lid and scrapers are strong polysulphone. The knife balk is acetal and the knives are stainless steel.

Developed for the best hygiene

The VCM is manufactured solely from hygiene certified material. The machine has smooth surfaces, rounded edges and has no unnecessary recesses where food might penetrate and get stuck. The machine base has a drainage hole to prevent



water accumulating on the top. For rapid cleaning, all loose components are easy to remove making the machine easy to rinse. All loose parts can be washed in the dishwasher.

Highest possible reliability

VCM's powerful motor has a high torque during start-up and when in service and powers the direct-driven cutter. No belts or intermediate connections. This makes the VCM an exceptionally reliable machine – irrespective of the foods you are working with.

VCM-41/42 Results



© AB Hällde Maskiner















Food Preparation Machines Made in Sweden

VCM-41/42 Vertical Cutter/Mixer

- The machine base and bowl are made of metal and can withstand rough handling.
- The direct action pulse function produces 1,500 rpm without any delay.
- Patented scraper system with four scraper arms speeds up the preparation.
- Three safety switches make it impossible to start the machine if the knife is exposed. Mechanical motor brake make the knife stop immediately when the safety arm is pushed aside.
- The bowl, lid, knife unit and scraper can all be washed in the dishwasher.
- The table top model is easy to put away and take out when needed with its two sturdy handles at the sides.

Machine

- Motor: 550/750 W. Two speeds (VCM-42), one speed (VCM-41). 230 V, 1-phase, 50-60 Hz. 100-120 V, 1-phase, 50-60 Hz. 230 V, 3-phase, 50 Hz. 400 V, 3-fas, 50 Hz.
- Transmission: Direct drive.
- Safety system: Three safety switches and mechanical motor brake.
- Degree of protection machine: IP44.
- Power supply socket: Earthed, 1-phase, 10 A. alt. earthed, 3-phase, 16 A.
- Fuse: 10 A, delayed action fuse.
- Sound level LpA (EN31201): 72 dBA.
- Magnetic field: Less than 0.1 mikrotesla.

Materials

- Machine base: Aluminium.
- Bowl: Stainless steel.
- Lid and scraper system: Polysulphone.
- Knife balk: Acetal.
- Knives: Stainless steel.

Volumes and dimensions

- Bowl volume: Gross 4 liter. Net liquids 1,6 liter.
- Feed tube diameter: 50 mm.

Knife unit

- Knife unit diameter: 190 mm.
- Speed VCM-42: 1500 och 3000 rpm.
- Speed VCM-41: 1500 rpm (50 Hz), 1700 rpm (60 Hz).

Type of preparation

- Chops, grinds, blends and mixes.
- Prepares dressings, herb oils, aromatic butters, thickenings, mayonnaise, sauces, soupes, minced meats, purées, patées, etc.
- Prepares meat, fish, fruit, vegetable, nuts, cheese, mushroom, chocolate, etc.

Users

• Restaurants, hospitals, shops, diet kitchens, salad bars, schools, day care centers, fast food kitchens, catering kitchens, etc.

Nettovikt


- Machine base VCM-42: 15,4 kg.
- Machine base VCM-41: 14,8 kg.

Standards

• EU Directive 98/37/EEC, LVD 73/23 EEC, EMC 89/336/EEC.





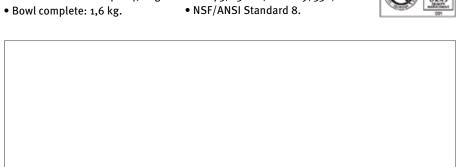

AB Hallde Maskiner P.O. Box 1165 SE-164 26 Kista Sweden

• Phone: +46 8 587 730 00 • Fax: +46 8 587 730 30 • www.hallde.com • info@hallde.com

