


SPECIFICATIONS

LPT1401-DD



2-dr Upright Top Mount Freezer

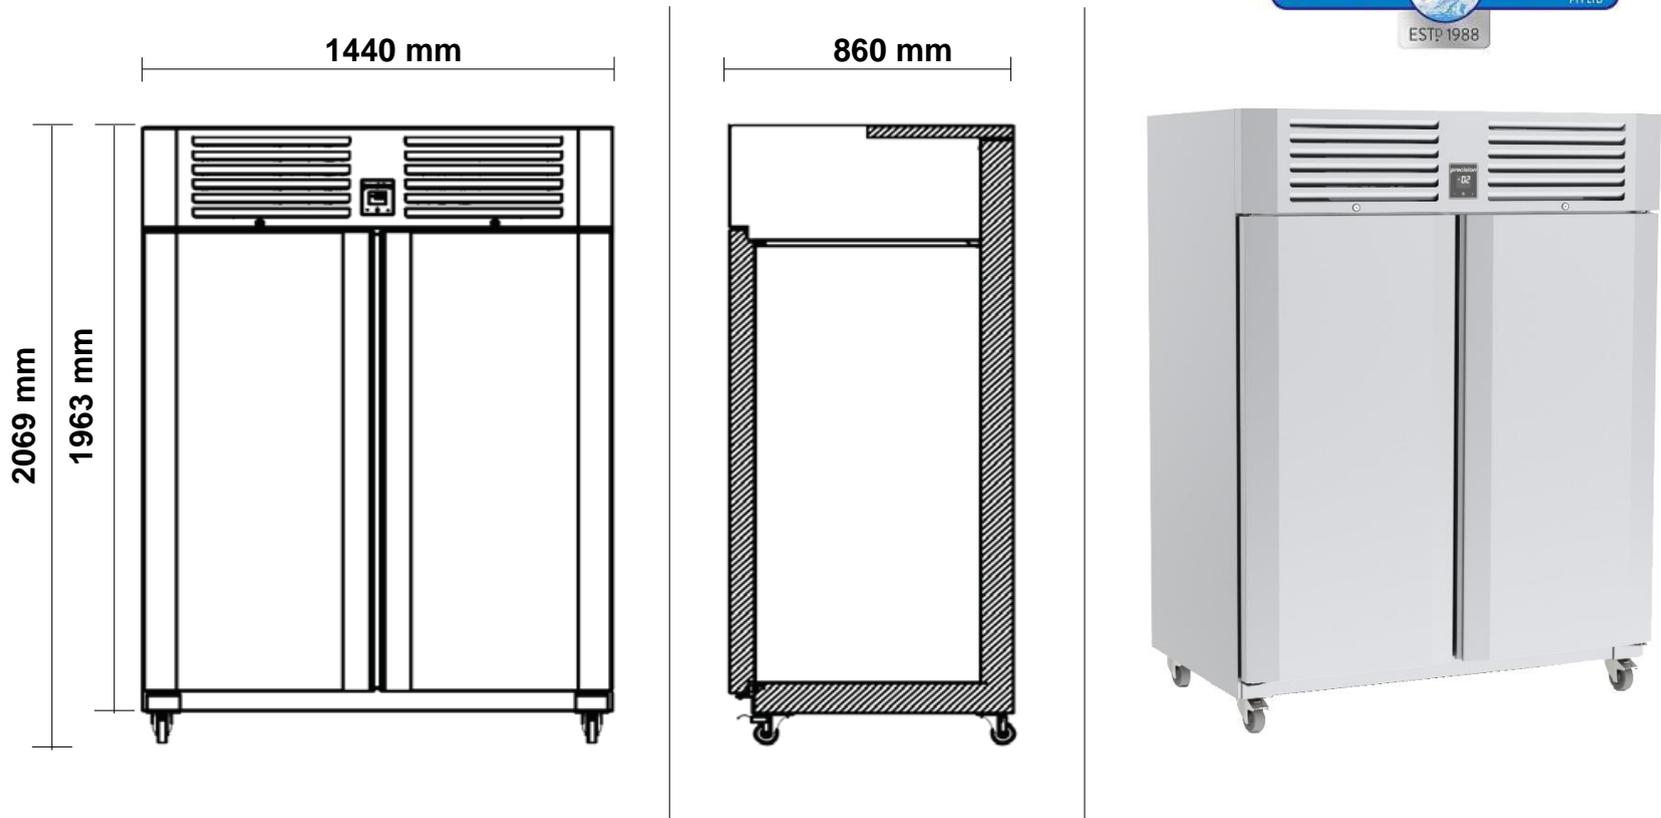

Specifications

Refrigeration system	Self-contained, top mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	150 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	5.5 Amps
Nominal capacity	728 Watts @ -30°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	1400 litres	Net usable GN volume	tbc
Weight	230 kg	dBA	76
Worktop	n/a		
Door Opening	2 x SS Self-Closing Lockable Doors (Accepts full GN1/1 & GN1/2 pans)		
Door Configuration	2 x Stainless Steel Solid Doors		
Shelves	4 x shelves & adjustable tray slides per door		Total = 8
Options	Glass Door, Remote, Legs/Castors		
Cabinet dimensions	External	Internal	
Width	1440 mm	1277 mm	
Depth	860 mm	657 mm	
Height	1963 mm (excl. legs or castors)		1459 mm

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au