


PRODUCT FEATURES

- Stainless steel interior and exterior.
- Split doors on Upright series.
- Programmable electronic controller and display.
- 2 years parts and labour warranty.
- Standard with 4 x shelves.
- Comes standard with 4 x lockable (115 mm) castors (not legs).
- Optional Adjustable legs 150 - 180mm (Sold separately).



TECHNICAL DRAWING

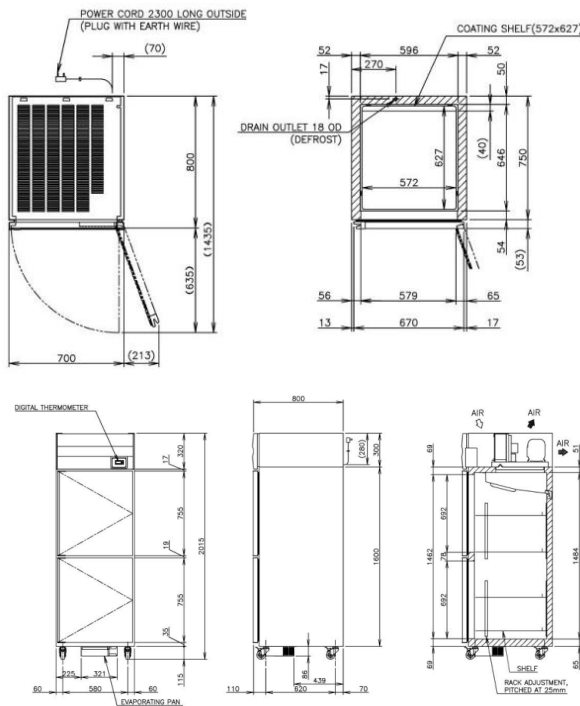

PRODUCT SPECIFICATION

Interior	Stainless Steel, ABS Plastic (Doors)
Exterior	Stainless Steel,Galvanized Steel (Top, Rear, Bottom)
Max Storage Capacity	569L
Temperature Control	Microprocessor adjustable from -23°C to -7°C
Evaporator	Fin & Tube type
Outside Dimensions	700mm (W) x 800mm (D) x 2015mm(H)
Inside Dimensions	596mm (W) x 646mm (D) x 1484mm(H)
Refrigeration System	Forced Air Circulation
Weight Net/ Gross (kg)	104/ 126
AC Supply Voltage	1 phase 220 - 240V 50Hz /10amp Plug
Amperage	Rated: 4.1A Starting: 8.5A
Refrigerant	R404A
Operating Conditions	Ambient Temp.: 5-43°C Voltage Range: Rated Voltage $\pm 6\%$

INSTALLATION REQUIREMENTS

- Equipment should not be located in direct sunlight or next to sources of high heat.*
- Allow at least 50 cm clearance between the front panel air inlet/outlet and the wall or other equipment for proper air circulation.*

*Refer to manual for full installation & maintenance requirements.



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

