

Technical data sheet for

SINGLE PAN GAS PASTA COOKER 450mm

PC8140G



- High performance single pan pasta cooker
- Patented infra-red burner system
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Intergrated water fill and starch skimming water faucet
- Six stainless steel pasta baskets supplied standard
- Incorporated basket drain stand
- Safety cut out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy service
- Fully modular
- Low back models (RNL) available

Overall Construction

- Pan 1.5mm 316 stainless steel
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 25mm (1") skimming overflow and pan drains drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 6 stainless steel baskets with moulded handle grips supplied standard (no lid on pasta cooker)
- 304 stainless steel wire basket support grid in pan

Controls

- Large easy to use knob - heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/ starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

Cleaning and Servicing

- Open stainless steel pan for easy clean
- Hinged basket drain stand
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for SINGLE PAN GAS PASTA COOKER 450mm

Specifications

Pan Size

Water capacity 40L
Width 365mm
Length 405mm
Basket immersion depth 165mm

Baskets

6 stainless steel perforated baskets with moulded plastic handles 125mm x 165mm x 180mm deep
Stainless steel wire basket support grid

Burners

1 x infra-red burner

Gas Power

47MJ/hr, 13kW Natural gas

46MJ/hr, 12.8kW LP gas

Gas Connection

R³/₄ (BSP) male.

300mm from RH side, 35mm from rear,

and 125mm from floor

All units supplied with Natural and LP gas regulator

Water Connection

Cold water connection 50mm from left hand side,

556mm from rear and 140mm from floor


R¹/₂ (BSP) male

Drain Connection

Drain must be connected to system suitable for boiling water discharge

1" BSP Male connection 118mm from left hand side, 470mm from rear, and 165mm from floor

PC8140G

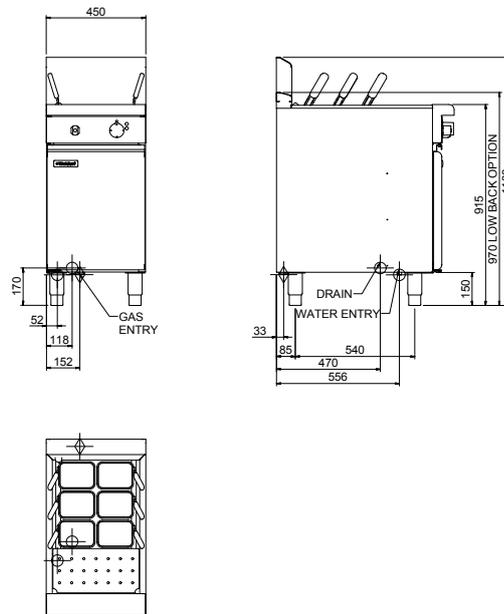

DIMENSIONS

Width 450mm
Depth 805mm
Height 915mm
Incl. low back 970mm
Incl. splashback 1130mm

PACKING DATA

0.53m³
Width 865mm
Depth 490mm
Height 1255mm

GAS TYPES

Available in Natural gas and LP gas.

Please specify when ordering

Units supplied complete with gas type conversion kits

Other gas types on request

OPTIONS AT EXTRA COST

Extra baskets - 165mm square x 180mm deep

Optional rectangular baskets 320mm x 165mm x 180mm deep

Side splash guards

Joining caps

Castors

Plinth mounting



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au