

## WD-PRM60 PRE-RINSE MACHINE – STRAIGHT INSTALLATION

### STANDARD FEATURES:

- 30 litre wash tank volume
- 0.75kW wash pump
- Suitable for straight installation for bar feeding or chain conveyor configuration
- Dual removable upper & lower wash arms
- Uses 'free' overflow water from main machine
- Large and easily removable scrap tray
- Removable doors for easy cleaning
- Includes electrical connection of the PRM to the rack conveyor

### TECHNICAL INFORMATION:

#### Dimensions

Width: 700mm  
Depth: 691mm  
Height: 1400mm  
1950mm (door open)

#### Electrical

\*Power via MAIN machine




*Refer operator manual for complete installation instructions*

#### Water

Water supplied by main machine

#### Waste

Connection:  
50mm dia (not supplied)  
Floor drain, capacity:  
3 litres per second

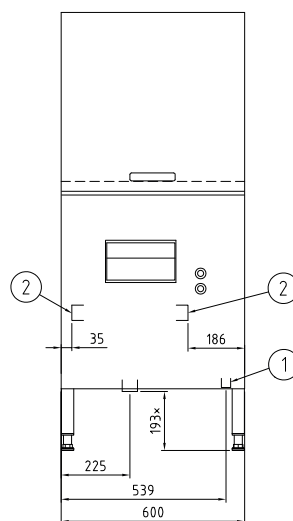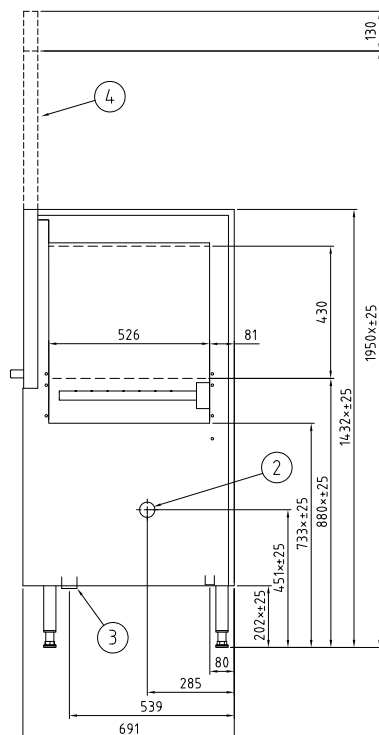

1. Electrical connection
2. Water connection from dish washing machine ø50
3. Drain ø50, 3 l/sec
4. Door (open position)

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.