

# SYNTHESIS 11/65

## GAS CONVEYOR OVEN

### 1SV440B



## SPECIFICATIONS

|                          |                                              |
|--------------------------|----------------------------------------------|
| Voltage                  | Single Phase, 230 VAC, 50/60 Hz              |
|                          | Current at 220-240 V~, 2A                    |
| Max Power                | 450 Watts                                    |
| Flame Control            | Electronic without pilot                     |
| Gas Absorption           | 86.4 MJ/h NAT Gas, 86.4 MJ/h UPLG Gas        |
| Injector Diameter (NAT)  | (G20 - 20 mbar) - 4 x 2.15 mm                |
| Injector Diameter (UPLG) | (G30 - 28...30 mbar) - 4 x 1.20 mm           |
| Min pressure (NAT)       | (G20 - 20 mbar) - 0.32Kpa                    |
| Max pressure (NAT)       | (G20 - 20 mbar) - 1 kPa                      |
| Min pressure (UPLG)      | (G30 - 28...30 mbar) - 0.9Kpa                |
| Max pressure (UPLG)      | (G30 - 28...30 mbar) - 2.75 kPa              |
| Consumption (NAT)        | (G20 - 20 mbar) - 2,540 m3/h                 |
| Consumption (UPLG)       | (G30 - 28...30 mbar) - 1.893 Kg/h            |
| Gas Pipe                 | 1/2"                                         |
| Weight                   | 252 kg                                       |
| Conveyor Width           | 26" (650 mm)                                 |
| Conveyor Length          | 1875 mm                                      |
| Chamber Length           | 1100 mm                                      |
| Chamber Height           | 100mm                                        |
| Cable Length             | 2m                                           |
| Plug Supplied            | Yes, 10 amps                                 |
| Noise level              | < 70 decibels                                |
| Max Humidity             | 95% without condensation                     |
| Ambient Temperature      | 0 - 40°C                                     |
| Thermostat               | 320°C                                        |
| Time Range               | 1:45 minutes - 30 minutes (or complete halt) |
| Warranty                 | 4 Year Warranty (2 yr Labour 4 yr Parts)     |

## DIMENSIONS

|                 |        |                 |        |
|-----------------|--------|-----------------|--------|
| External Width  | 2000mm | Internal Width  | 1100mm |
| External Depth  | 1400mm | Internal Depth  | 650mm  |
| External Height | 550mm  | Internal Height | 100mm  |




## Main Features

- Made entirely from stainless steel
- Double glazed full width inspection door
- Easy access for thorough cleaning
- Cooling system for contact parts
- Omnidirectional wheels with breaks
- Conveyor belt with variable speed down to a complete halt
- 100 mm high cooking chamber
- Fine tuning of the ventilation flow
- Jets of hot air completely wrap the product as it moves along the wire mesh conveyer giving an evenly cooked result time after time
- All Synthesis ovens are stackable so you can step up your productivity to meet peak demand
- Management of 6 cooking programs: for each program you can set the cooking time and temperature
- Economy function keeps the oven at a lower temperature if it doesn't need to be operated at full working temperature
- Timer for programmed start, digital clock and self diagnostics

# SYNTHESIS 11/65 SINGLE STACK CONVEYOR




## FRONT

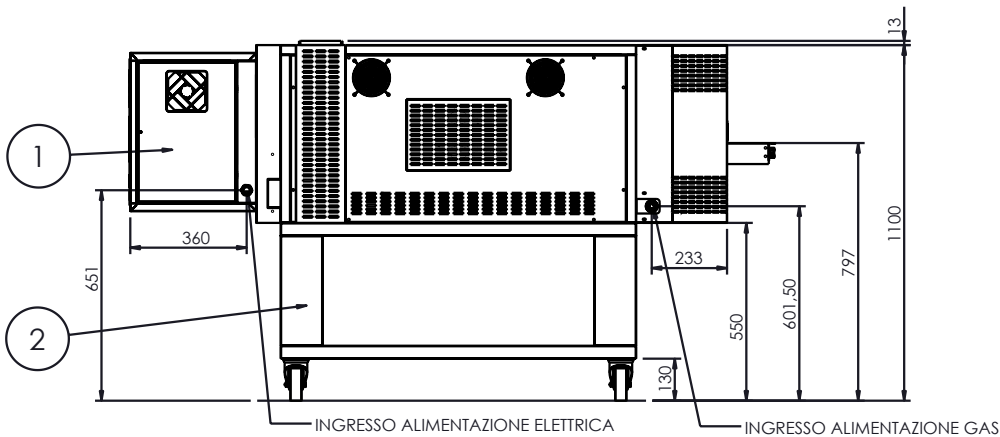


| Num. articolo | Quantità | Descrizione          | Potenza    |
|---------------|----------|----------------------|------------|
| 1             | 1        | SYNTHESIS 11/65V GAS | 24+0.81 kW |
| 2             | 1        | BASAMENTO H=550      | -          |

## SIDE

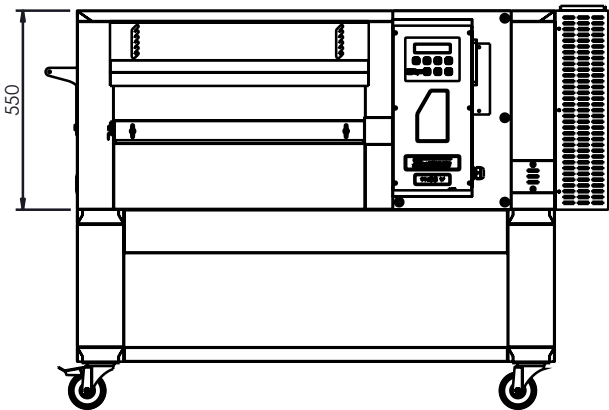

## TOP

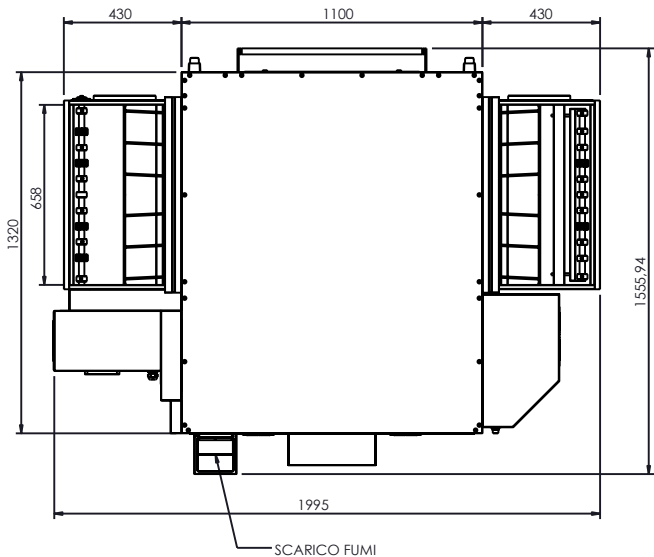


We reserve the right to alter specifications without notice.

# SYNTHESIS 11/65 DOUBLE STACK CONVEYOR




FRONT

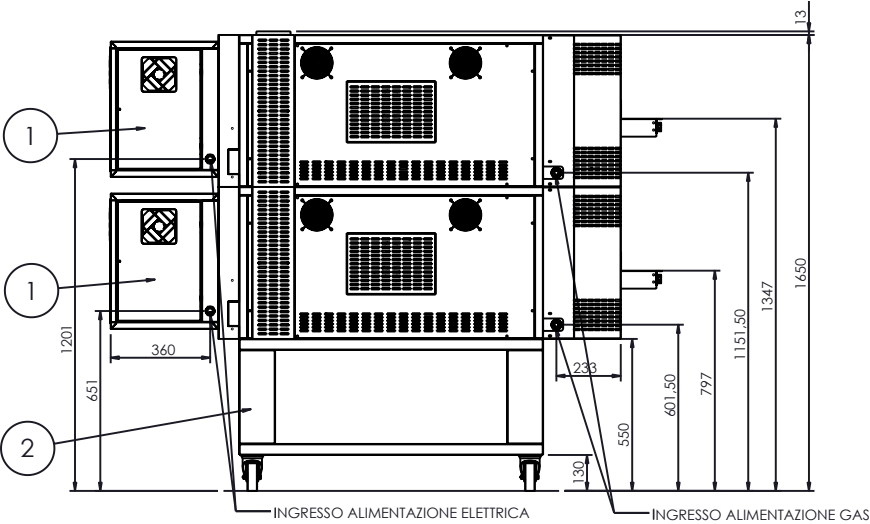


| Num. articolo | Quantità | Descrizione          | Potenza    |
|---------------|----------|----------------------|------------|
| 12            |          | SYNTHESIS 11/65V GAS | 48+1.62 kW |
| 21            |          | BASAMENTO H=550      | -          |

TOP

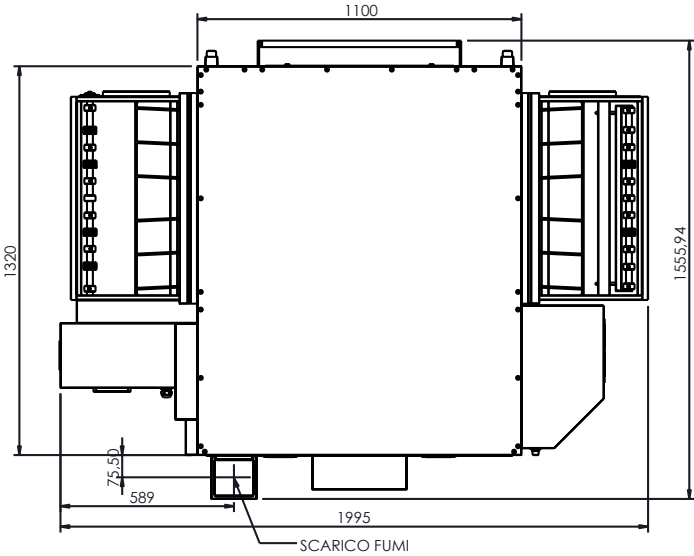

SIDE

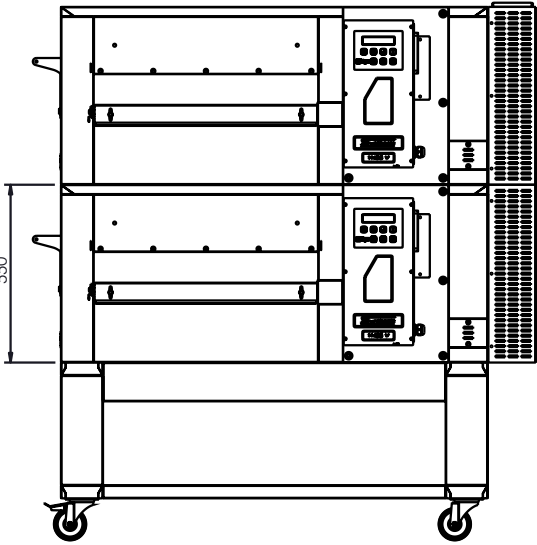


We reserve the right to alter specifications without notice.

# SYNTHESIS 11/65 TRIPLE STACK CONVEYOR




FRONT

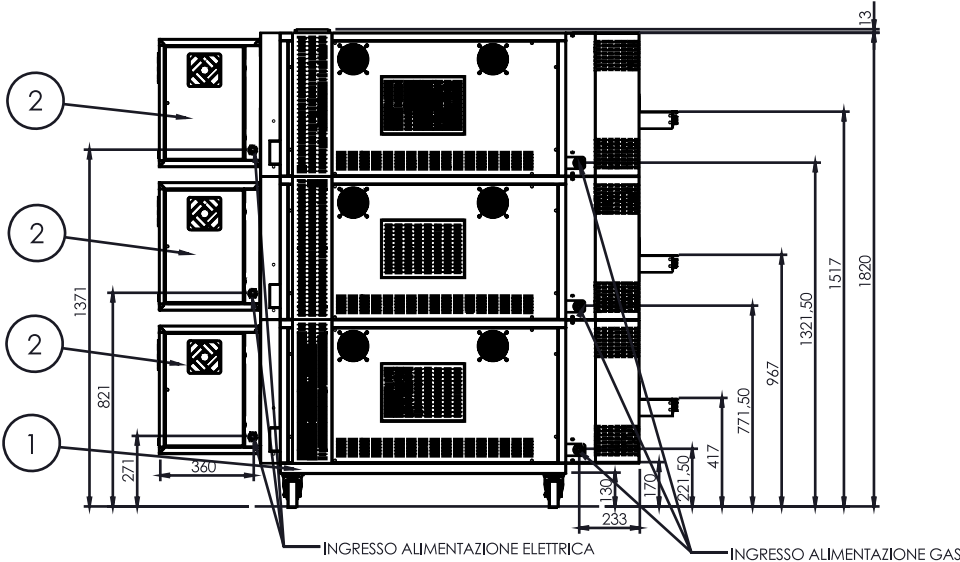


| Num. articolo | Quantità | Descrizione          | Potenza    |
|---------------|----------|----------------------|------------|
| 1             | 1        | BASAMENTO H=170      | -          |
| 2             | 3        | SYNTHESIS 11/65V GAS | 72+2.43 kW |

TOP

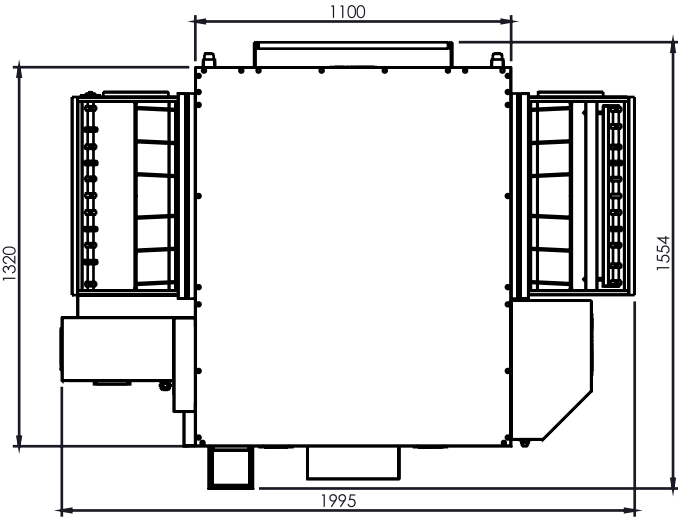

SIDE

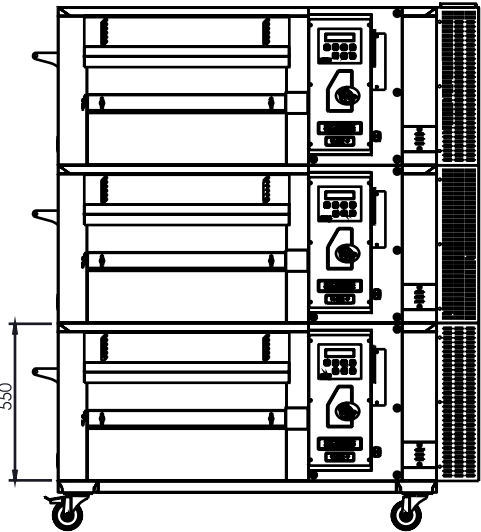

PH: 08 9302 1299  
 51 Paramount Dr Wangara WA 6065  
[sales@practicalproducts.com.au](mailto:sales@practicalproducts.com.au)  
[www.practicalproducts.com.au](http://www.practicalproducts.com.au)

We reserve the right to alter specifications without notice.