

# CR6D

## 600mm Four Burner Gas Range Static Oven



CR6D

- 600mm wide
- 4 open burners
- 22MJ open burner rating
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners
- Cast iron burners and vitreous enamel potstands
- High crown static oven
- 1/1 GN pan capacity
- Manual pilot ignition
- Side hinged door
- Vitreous enameled oven liner
- Adjustable front feet and rear rollers
- Stainless steel finish
- Fully modular

### Also Available



CR6B



CR6C

### OVERALL CONSTRUCTION

#### Cooktop

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- Vitreous enamelled control panel
- Stainless steel front, sides and splashback
- Stainless steel spill tray

#### Oven

- Vitreous enamelled oven liner
- GN 1/1 capacity with 4 position racking
- Supplied with one chrome plated oven rack
- Vitreous enamelled oven spill tray
- Stainless steel door and sides
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear

### CONTROLS

#### Cooktop

- Large easy use control knobs
- Variable high to low controls to open burners
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners

#### Oven

- 100-310°C thermostatic oven control
- Piezo ignition to oven pilot burner with flame failure

### CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Removable spill trays
- Access to all parts from front of unit

### Matching Products



CW2H



CSP6



CN4



CT9



CW3H



CW1H



CP4




CS9 / C900-S

**COBRA®**

YOUR STYLE, YOUR WAY

# CR6D

## 600mm Four Burner Gas Range Static Oven

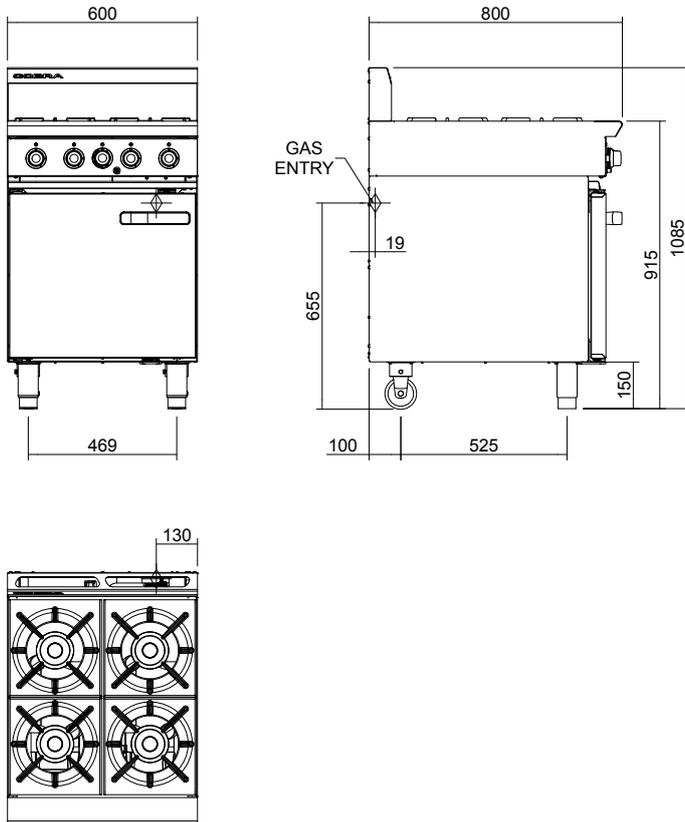

CR6D

### SPECIFICATIONS

#### Burners

Open Burners;  
22MJ/hr, 6.1kW each

Oven; 24MJ/hr, 6.7kW

Gas power (gross)  
CR6D 112MJ/hr, 31.1kW

#### Oven dimensions

Width 460mm

Depth 615mm

Height 365mm

#### Rack size

450mm x 590mm

Rack positions 4

#### Gas connection

R 3/4 (BSP) male  
130mm from RH side, 20mm from  
rear, and 655mm from floor

#### Dimensions

Width 600mm

Depth 800mm

Height 915mm

Incl. splashback 1085mm

#### Nett weight

99kg

#### Packing data

0.85m<sup>3</sup>, 130kg

Width 710mm

Depth 955mm

Height 1250mm

#### Gas types

Available in Natural gas and LP gas,  
please specify when ordering  
Other gas types on request



Cert. No. AGA 7225G

an Ali Group Company



The Spirit of Excellence



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au